



extreme environment lighting

GAI2

SKU: 111808


Color Output: White Dimming, Red Non Dimming, Blue Non Dimming

Finish: Brushed


Our best-selling positionable light just got better. Lumitec's newly enhanced General Area Location (GAI) light now has TWICE the output and a new, more efficient optical system! GAI's small size and high output make this light perfect for a wide range of applications: chart light, reading light, task light or even a deck light. Completely sealed and IP67 compliant.



- Voltage: 10 - 30vDc
- 12vDC Amps: 300mA
- 24vDC Amps: 160mA
- Correlated Color Temperature: 5000
- Color Rendering Index: 70+
- Rated Watts: 6
- Lumens (White): 372
- Operating Temp (°C): -35 to +55 C
- Operating Temp (°F): -31 to + 131 F
- IP67 Compliant
- Certified Ignition Protected

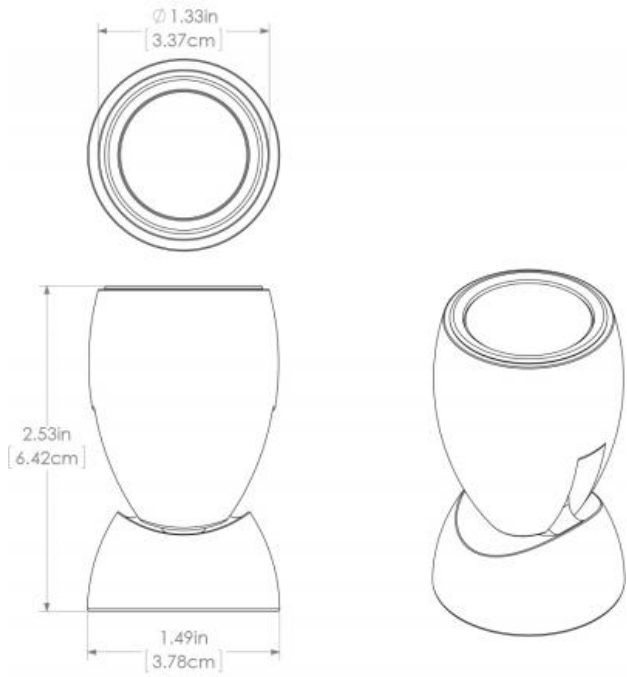

Dimensions: 2.53in (6.42cm) (W) x 2.53in (6.42cm) (H) x 1.49in (3.78cm) (D)

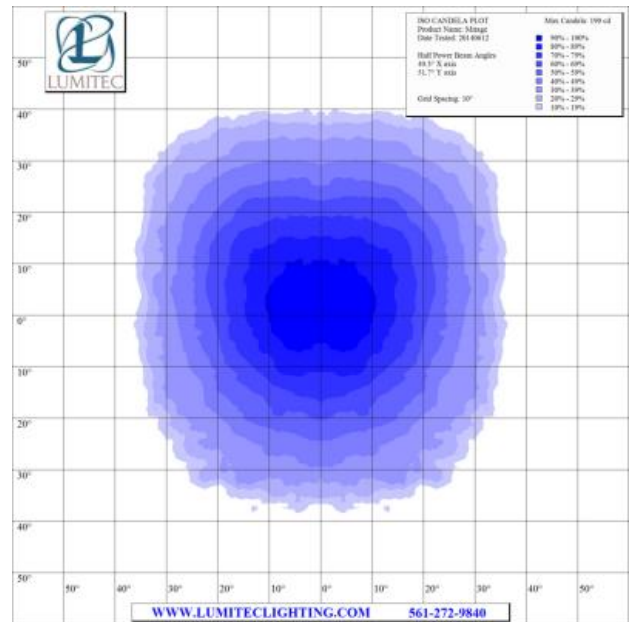

www.lumiteclighting.com | Phone: (561) 272-9840 | info@lumiteclighting.com



ISO LUX PLOT
Product Name: Mirage
Date Tested: 20140612

Max Lux at 10': 20 lx

Target Distance: 10'
Grid Spacing: 2'

- 90% - 100%
- 80% - 89%
- 70% - 79%
- 60% - 69%
- 50% - 59%
- 40% - 49%
- 30% - 39%
- 20% - 29%
- 10% - 19%

